



Model WX-3036

Dimensions

<b><u>LOA:</u></b>	36"	91.4 cm
<b><u>Diameter:</u></b>	3"	7.6 cm
<b><u>OD:</u></b>	4.25"	10.8 cm
<b><u>Weight:</u></b>	22 .2 lbs	10 kg
<b><u>Fittings:</u></b>	3/4"	1.95 cm

Male


Design Specifications

<b><u>DWV:</u></b>	3" Copper	ASTM B306
<b><u>Copper Waterline:</u></b>	3/4 inch Type L	ASTM 88/NSF 61
<b><u>Working pressure:</u></b>	3" DWV	273 psi @ 100F
	Type L	631 psi @ 100F
<b><u>Certification Pressure</u></b>		150 psi

<u>Efficiency</u>	<u>Pressure Loss</u>	9.5 l/min
39.7%	2.4 Psi	

Shipping Dimensions and Weights

<b><u>LOA:</u></b>	37"	93.9 cm
<b><u>Width:</u></b>	7"	18 cm
<b><u>Height:</u></b>	6"	16 cm
<b><u>Weight:</u></b>	25.5 lbs	11.5 kg

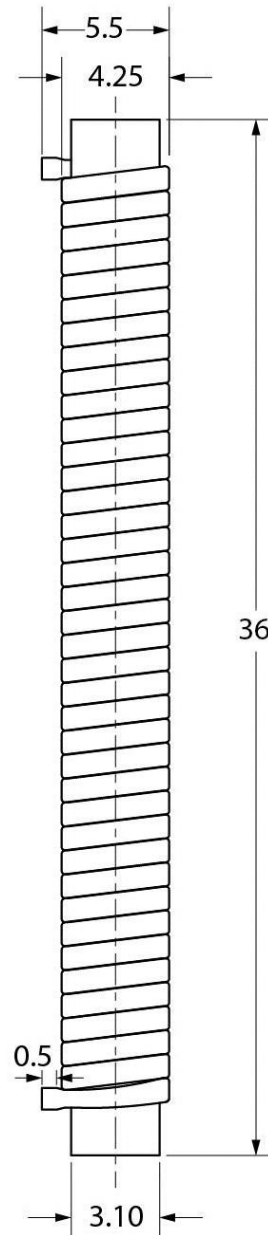

Verified to CSA B55.1



Certified to CSA B55-2

